



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

G01V 15/00

A2

(11) International Publication Number:

WO 98/15853

(43) International Publication Date:

16 April 1998 (16.04.98)

(21) International Application Number: PCT/GB97/02760

(22) International Filing Date: 8 October 1997 (08.10.97)

(30) Priority Data:

9621000.0

9 October 1996 (09.10.96)

GB

(71) Applicant (for all designated States except US): FLYING NULL LIMITED [GB/GB]; Harston Mill, Harston, Cambridgeshire CB2 5NH (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DAMES, Andrew, Nicholas [GB/GB]; 74 De Freville Avenue, Cambridge CB4 1HU (GB).


(74) Agents: ABRAMS, Michael, John et al.; Haseltine Lake & Co., Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: MAGNETIC TAGS AND TECHNIQUES

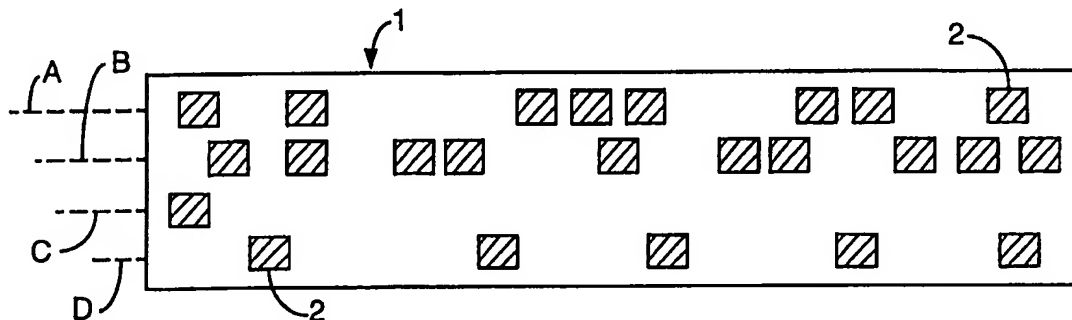

(57) Abstract

A multi-bit magnetic tag is disclosed which comprises a substrate (1) carrying a plurality of magnetised zones (2), the magnetic material from which said zones are formed being an anisotropic magnetic material having an axis of easy magnetisation; at least two of the magnetically active zones (2) are such that their easy axes of magnetisation are non-parallel. Tags of this form may be manufactured by sputtering a magnetically anisotropic material onto a substrate (1) carried on a coating drum while a non-uniform magnetic bias is applied to, or close to, the drum or the substrate (1) so as to influence the direction of the axis of easy magnetisation of the magnetically anisotropic material as it is deposited by the sputtering process. The coated substrate is then removed from the coating drum and cut into tags of the desired shape and size. Other multi-bit magnetic tags are also described.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

MAGNETIC TAGS AND TECHNIQUES

In previous patent applications, in particular
PCT/GB96/00823 (WO 96/31790) and PCT/GB96/00367
5 (WO 97/04338), we have described and claimed novel
techniques for spatial magnetic interrogation and novel
magnetic tags. The technology described in WO 96/31790
is based on exploiting the behaviour of magnetic
materials as they pass through a region of space
10 containing a magnetic null. In particular, these
earlier applications describe, inter alia, how passive
tags containing one or more magnetic elements can
perform as remotely-readable data carriers, the number
and spatial arrangement of the elements representing
15 information.

In the above applications we described a number of
possible system embodiments employing either permanent
magnets or electromagnets to create the magnetic null.
20 We also described several system implementations some
of which are particularly appropriate for tags
employing very low coercivity, high permeability
magnetic elements. These implementations work by
detecting harmonics of a superimposed low-amplitude
25 alternating interrogation field.

The present application relates to novel magnetic tags
and to methods of reading magnetic tags.

30 According to one aspect of the present invention, there
is provided a multi-bit magnetic tag which comprises a
substrate which carries at least two magnetically
active zones each formed of the same material and each
of substantially the same shape and size.

35 Preferably a tag as just defined comprises from three

to twenty magnetically active zones; these may be arranged in a regular or irregular formation, e.g. in line along a strip-form tag; or as a two-dimensional array on a tag.

5

Data may be generated in a number of ways with such tags - for example, by one or more of the following: the number of magnetically active zones; their relative positions on the tag; the spacing between the
10 magnetically active zones; and the intensity of magnetisation of the zones.

According to another aspect of the present invention, there is provided a multi-bit magnetic tag which
15 comprises a substrate which is coated with a magnetic material carrying a plurality of magnetised zones spaced apart from one another by non-magnetised areas.

According to a third aspect of the present invention
20 there is provided a multi-bit magnetic tag which comprises a substrate carrying a plurality of magnetised zones characterised in that the magnetic material from which said zones are formed is an anisotropic magnetic material having an axis of easy
25 magnetisation, and in that at least two of the magnetically active zones are such that their easy axes of magnetisation are non-parallel.

With the third aspect as defined above, an additional
30 source of data - namely the direction of the axis of easy magnetisation (hereinafter termed "DEAM") - is present in the tag. This may be used in combination with the variables described earlier in relation to the first embodiment. Also, it may be used in combination
35 with isotropic magnetic zones to give further datum determinants.

Preferably a tag as just defined comprises at least three magnetised zones; these may be arranged in a regular or irregular formation, e.g. in line along a strip-form tag; or as a two-dimensional array on a tag.

5 These magnetised zones may be spaced apart by non-magnetised areas, or they may be substantially adjacent, or they may be spaced apart by differently magnetised zones (although in such a case the intervening magnetic material will be chosen so as not

10 to inhibit or corrupt the desired variation in DEAM).

Data may be generated in a number of ways with such tags - for example, by one or more of the following: the number of magnetically active zones; their relative

15 positions on the tag; the spacing between the magnetically active zones; and the intensity of magnetisation of the zones.

According to a fourth aspect of the present invention,

20 there is provided a method of making a tag as defined above, which method comprises sputtering a magnetically anisotropic material onto a substrate carried on a coating drum, characterised in that a non-uniform magnetic bias is applied to, or close to, the drum or

25 the substrate so as to influence the direction of the axis of easy magnetisation of the magnetically anisotropic material as it is deposited by the sputtering process; removing the coated substrate from the coating drum; and cutting the coated substrate into

30 tags of the desired shape and size. This permits tags with variable DEAM to be manufactured by sputtering techniques utilising a magnetic bias during the sputtering operation. The magnetic bias may, for example, be associated with the cooled drum carrying

35 the substrate onto whose surface a magnetic alloy is being deposited. In one technique for producing such

- tags, a spatially alternating magnetic bias magnet is positioned beneath the surface of the drum. A suitable bias magnet for this purpose is one formed of a flexible polymeric material containing magnetisable particles, e.g. ferrite. These flexible sheets can readily be magnetised according to any desired pattern of magnetisation, and so more complicated patterns may be generated if desired.
- 10 During normal sputtering of anisotropic magnetic materials using a rotating cathode and either conventional or rotating magnetrons, the DEAM extends across the width of the film which is being produced. By placing a permanently magnetised sheet with a
- 15 regularly varying pattern of magnetisation behind the coating drum, the sputtered material experiences varying magnetic environments as the drum rotates. Where the magnetisation behind the drum is very low or zero, the sputtered material will have its DEAM aligned
- 20 across the width of the web, as normal; as the underlying magnetic field increases, it will progressively influence the environment at which deposition occurs, resulting in the DEAM swinging around from its "zero point" direction to a new
- 25 direction whose vector depends upon the magnetisation direction underlying the drum. By using a bias magnet which has bands of alternating field direction, the DEAM of the sputtered web can be made to rotate as the web is produced. The rotation is not uniform, however,
- 30 since a certain field strength is required before the deposited material "flips" away from its zero point DEAM.

- It is also possible to use magnetic bias means
- 35 positioned outside the drum, provided care is taken to prevent problems arising with the magnetrons used in

the sputtering process.

According to another aspect of the present invention, there is provided a method of reading data stored in a magnetic tag, which comprises subjecting the tag to a relatively large substantially static magnetic field which progressively reduces to zero; and, at least when the said magnetic field is at or approaching zero, subjecting the tag additionally to a relatively low amplitude alternating magnetic field; and detecting the response of the tag when the substantially static field is at or in the vicinity of its zero point and the tag is experiencing the alternating magnetic field.

The substantially static magnetic field will usually be a DC magnetic field; it could alternatively be a slowly changing field, as for example would be obtained if two electromagnets generate the field and are fed with ac of say 1 Hz or less.

The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows a plan view of one tag in accordance with this invention;

Figure 2 shows a plan view of another tag in accordance with this invention;

Figure 3 shows a plan view of a third tag in accordance with this invention;

Figure 4 shows a magnetic biasing means for use in generating tags with variable DEAMs; and

Figure 5 illustrates how the DEAMs vary in dependence

on the properties of the magnetic biasing means of Fig. 4.

In the tags of Figures 1-3, the tag comprises a substrate 1 which carries a plurality of magnetically active zones such as 2.

In Figures 1 and 2, each zone of magnetically active material is formed of the same material and has substantially the same shape and size. The zones in Figure 2 form a simple liner array, while those of Figure 1 are arranged in four linear arrays indicated by dashed lines A, B, C and D.

Figure 3 shows two of a series of identical tags produced from a web 4 obtained from a sputtering machine which is operated with magnetic biasing means underlying the coating drum. The arrows show the DEAM for each of the zones; as shown, zones 2, 3_a, 3_b and 3_c have different DEAM. The gaps 6 between the magnetically active zones can be formed by modifying the magnetic properties of the sputtered material during or after the sputtering process.

Figure 4 shows a magnetic biasing means for use in producing tags having variable DEAMs. The means consists of a flexible polymer sheet incorporating fine particles of ferrite which are magnetised in alternating field directions F_1 , F_2 , F_1 , F_2 , etc. as shown.

The resultant web of sputtered material is shown in Figure 5. Here, the dashed and chain lines E, F and G are used to correlate field directions F_1 (line E), F_2 (line G) and zero field (line F) in the magnetic biasing sheet with the resultant DEAMs K, L and M in

the sputtered web. Cutting such a web into thin strips produces a series of strip labels whose characteristics resemble those of Fig. 3, but with a more regular variation of the DEAM.

5

The invention is not restricted to the embodiments described above, which are given as a non-limiting examples.

CLAIMS:

1. A multi-bit magnetic tag which comprises a substrate carrying a plurality of magnetised zones
5 characterised in that the magnetic material from which said zones are formed is an anisotropic magnetic material having an axis of easy magnetisation, and in that at least two of the magnetically active zones are such that their easy axes of magnetisation are non-
10 parallel.

2. A tag as claimed in claim 1, characterised in that the tag comprises at least three magnetised zones.

15 3. A tag as claimed in claim 1 or 2, characterised in that said magnetised zones are spaced apart from one another by non-magnetised zones.

4. A method of making a tag as claimed in claim
20 1, which method comprises sputtering a magnetically anisotropic material onto a substrate carried on a coating drum, characterised in that a non-uniform magnetic bias is applied to, or close to, the drum or the substrate so as to influence the direction of the
25 axis of easy magnetisation of the magnetically anisotropic material as it is deposited by the sputtering process; removing the coated substrate from the coating drum; and cutting the coated substrate into tags of the desired shape and size.

30

5. A method according to claim 4, characterised in that a spatially alternating magnetic bias magnet is positioned beneath the surface of the coating drum during the sputtering operation.

35

6. A method according to claim 5, characterised

in that said spatially alternating magnetic bias magnet is formed of a flexible polymeric material containing magnetisable particles, e.g. ferrite, which have been magnetised to give the desired bias pattern.

5

7. A method of reading data stored in a magnetic tag, which comprises subjecting the tag to a relatively large substantially static magnetic field which progressively reduces to zero; and, at least when the
10 said magnetic field is at or approaching zero, subjecting the tag additionally to a relatively low amplitude alternating magnetic field; and detecting the response of the tag when the substantially static field is at or in the vicinity of its zero point and the tag
15 is experiencing the alternating magnetic field.

Fig.1.

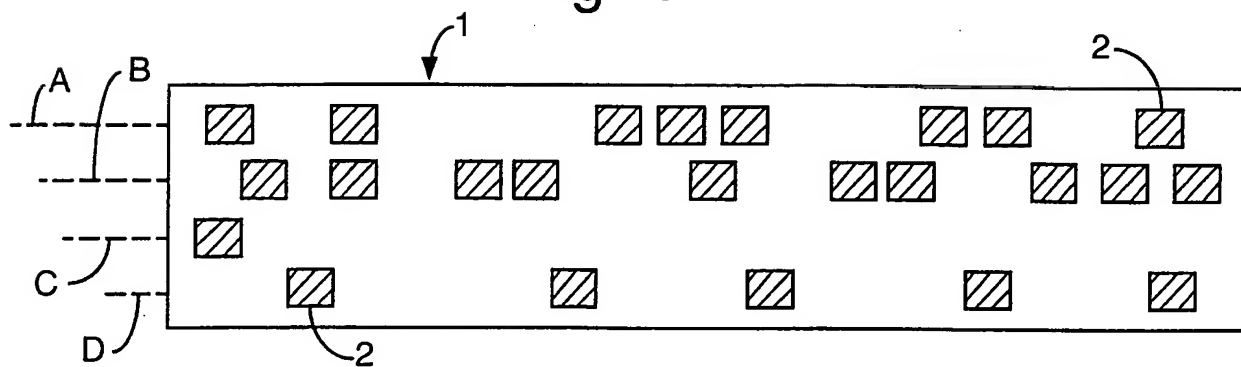


Fig.2.

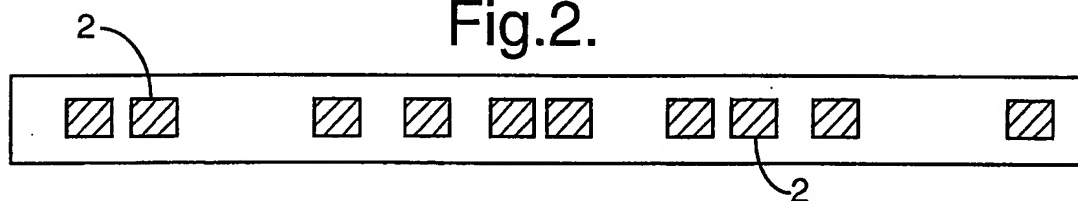


Fig.3.

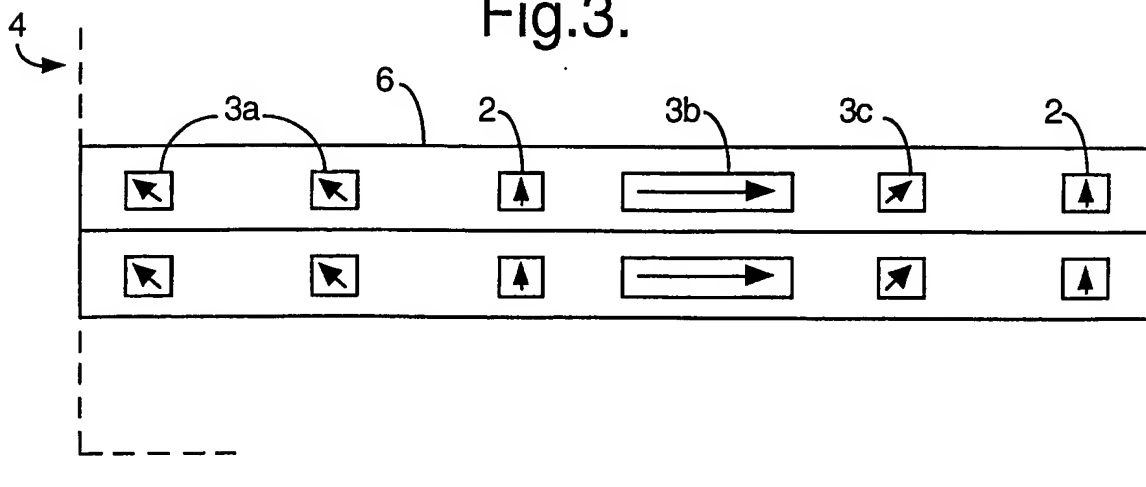


Fig.4.

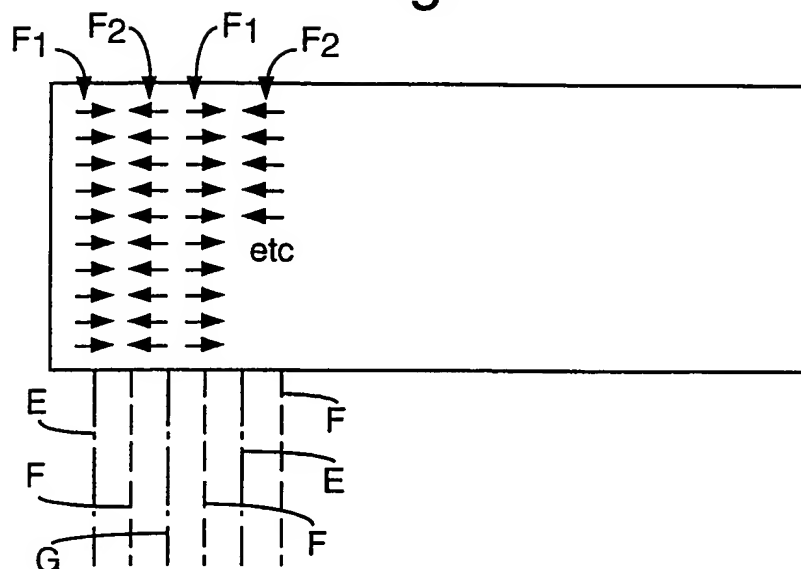


Fig.5.

